

TLE-200G6M

Multicrystalline Silicon Photovoltaic Module

- High power module using 6" multicrystalline solar cell.
- 54 solar cells and connection in series.
- 14.22% module conversion efficiency.
- Bypass diode minimizes power drop by shade.
- Using optical low iron tempered glass, EVA laminate and Tedlar backsheets.
- Anodize aluminum frame protected.
- Manufactured in ISO 9001 : 2000 certified facility.
- 20-years limited warranty on power output.
- IEC61215 and CE certified.



ELECTRO-OPTICAL CHARACTERISTICS

P/N	TLE -200G6M			
Parameters	Symbol	Typ	Unit	Condition
Maximum power	Pmax	200	W	Irradiance: 1000W/m ² Module Temperature 25°C
Maximum power voltage	Vpm	25.50	V	
Maximum power current	Ipm	7.85	A	
Open circuit voltage	Voc	33.03	V	
Short circuit current	Isc	8.31	A	
Module efficiency	ηm	14.22	%	

SPECIFICATIONS



No. of cells and connections	54 in series
Maximum system voltage	DC 1000V
Series fuse rating	10A
Maximum power	200 W
Dimensions	1481x989x47.5mm
Weight	17.2kg

ABSOLUTE MAXIMUM RATINGS

Parameters	Rating	Unit
Operating temperature	-40 to +90	°C
Storage temperature	-40 to +90	°C

TEMPERATURE COEFFICIENTS

Pmax	-0.5133 %/K
Voc	-0.3246 %/K
Isc	0.02818 %/K

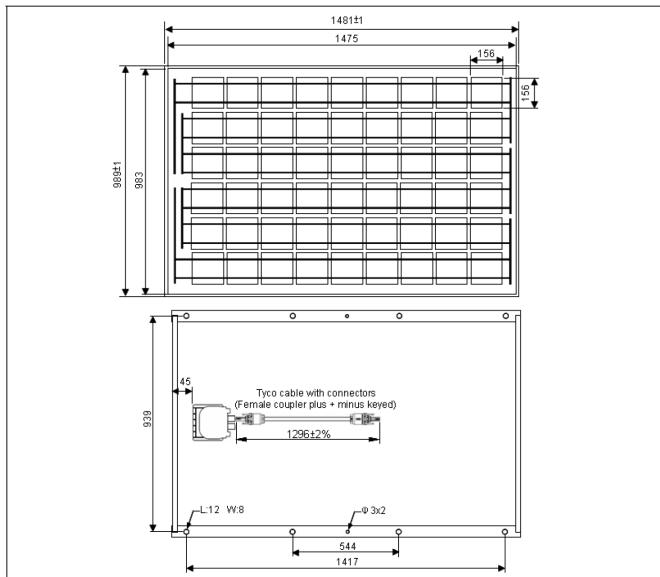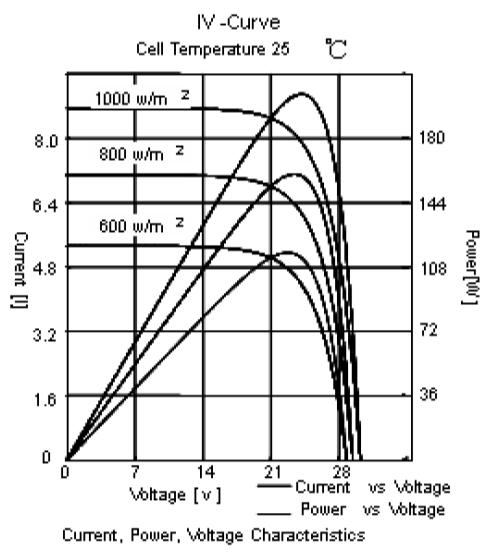

Specifications are subject to change without notice.