
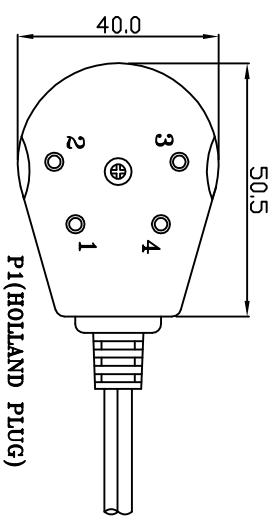


| | | |
|----|----|-------|
| P1 | P2 | P3 |
| 2 | 2 | 3 |
| 3 | 3 | 4 |
| | | RED |
| | | GREEN |

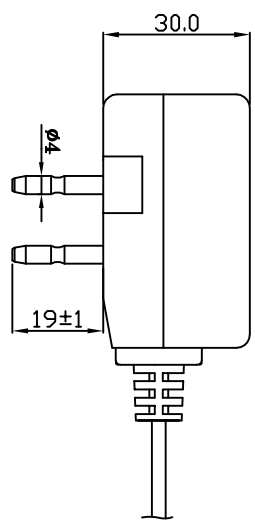

- Note:
1. The circuit is only a general way in this drawing, can revise the circuit on the basis of the customer's need.
 2. This product can be done for many kinds of colors according to the needs of customer.
 3. "L" shows that takes the length of cable, can change according to customer's enquiry.

| | | | |
|-------------|------------------|--------------|---|
| DRAWN | | UNIT | |
| INSPECTED | | CUS.PART NO. | |
| APPROVED | | CUSTOMER | |
| TITLE | HL009BC623U0V/2M | | |
| DRAWING NO. | M4061 | REV | A |

| TOLERANCE GENERALES | | | |
|---------------------|---|--------------|------|
| PLASTIC DIMENSION | X | X.X | X.XX |
| tolerance(±) | 1 | 0,5 | 0,20 |
| CABLE LENGTH | X | tolerance(±) | |
| | | 2% | |

TLE TUNG-LI CO., ISO-9001
L2000633