

RoHS Compliant

L(SEE TABLE A)


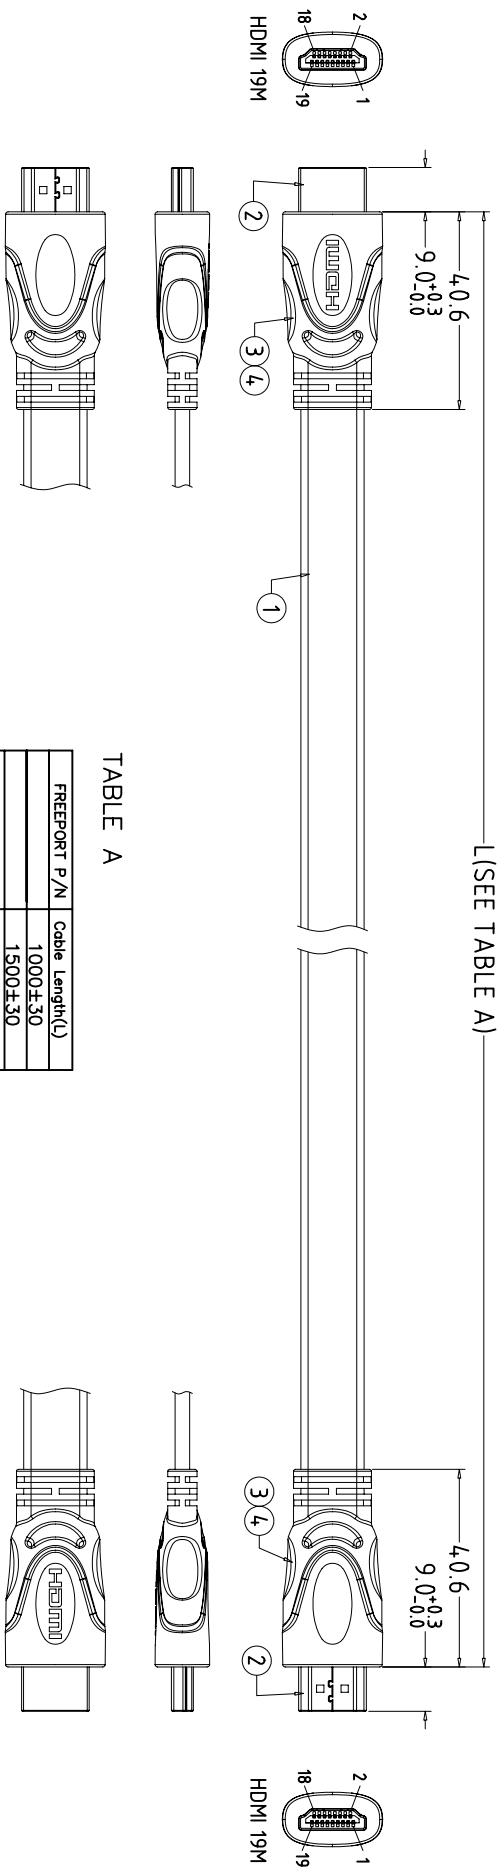


TABLE A

FREEPORT P/N	Cable Length(L)
	1000±30
	1500±30
	2000±30
	3000±40

ELECTRICAL CHARACTER:
 1)100% OPEN&SHORT TESTING
 2)WITHSTANDING VOL TAGE:DC 300V 0.015sec
 3)INSULATION RESISTANCE:10M Ohm(Min)
 4)CONDUCTIVE RESISTANCE:2 Ohm(Max)

PIN ASSIGNMENT:

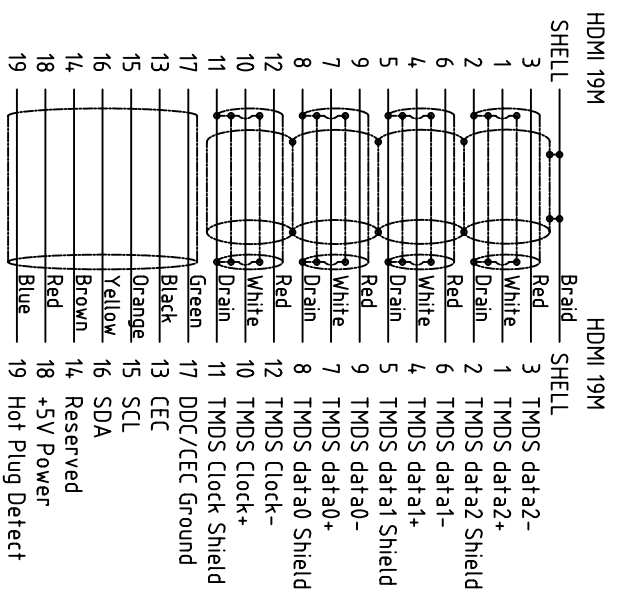

4	Overmold	PVC 70Pa Black UL94V-0			PPV-70010101
3	Innermold	PE Low density			
2	Conn	HDMI 19P/M 30U"/Au Black Shell G/F Plated Solder type W/PCB			515019P-33H-E1
1	Cable	UL 20276(2C×28AWG+2D+AL+MYLAR+B)×4C+1(7C×30#+D+AL)×1C OD3.0×13.0mm PVC Jacket-Black Impedance:100ohm			W04-2801501A00A01
NO.	PART NAME	SPEC DESCRIPTION	REMARK		
	INNERMOLD	TOLERANCE UNSPECIFIED			
	M1HM019M0N38	.xxx ± .xxx ± .x ±			
	OVERMOLD	ANGLE			
	M2HM019M0N38	DRAWN:	NAME	SCALE	UNIT
		DESIGNER:	HDMI A-A Cable(Flat 28#)	NON	mm
		CHECKED:			SHEET
		APPROVED:			1/1
			DRAWING NO.		REV
					1.0

TUNGLI