

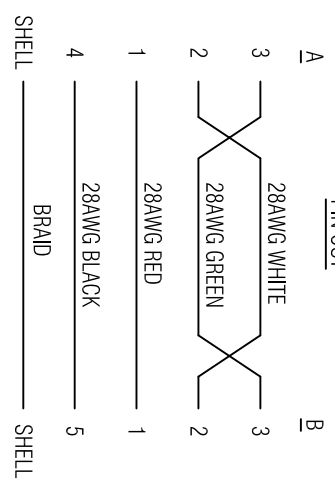
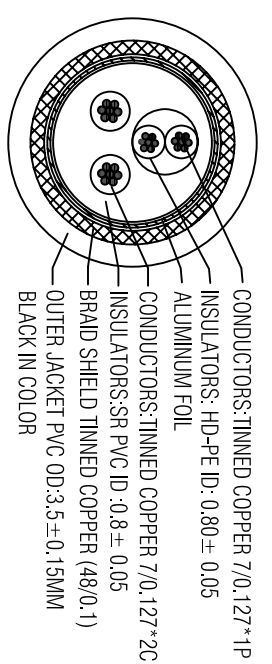


LW-R-06 A/0

REVSIONS		DESCRIPTION	DATE	APPROVED
1	A	RELEASE	2010.05.25	Ann

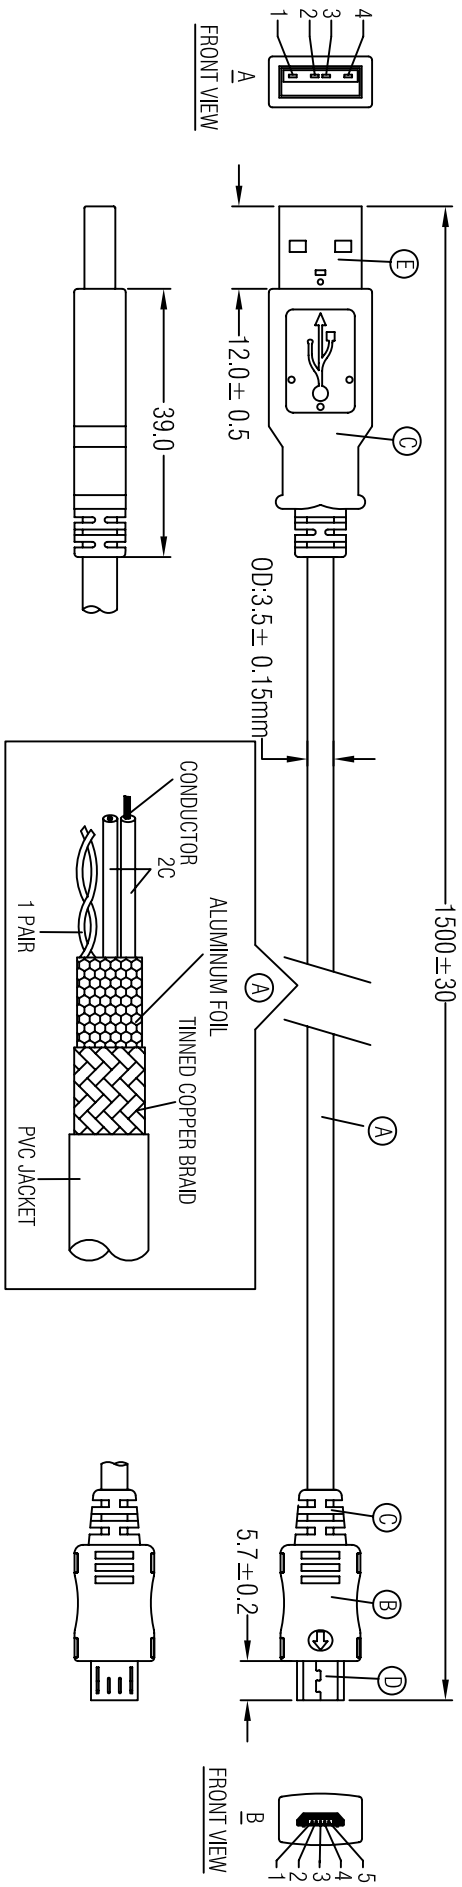

ITEM NO	ITEM	DESCRIPTION	VENDER	UNIT	QTY
A	AMM	USB A MALE CONNECTOR,INSULATOR COLOR:WHITE,PIN GOLD FLASH,SHELL PLATED NI,(GREEN PART)		PCS	1
B	D	MICRO USB 9P- MALE CONNECTOR,INSULATOR COLOR:BLACK,PIN GOLD FLASH,SHELL PLATED NI,(GREEN PART)		PCS	1
C	SR	45P PVC MOLDING HOUSING,COLOR:BLACK(GREEN PART)		PCS	1
D	COVER	MICRO USB CONNECTOR ASSEMBLY COVER(WITH TOP,BOTTOM),COLOR:BLACK(GREEN PART)		PCS	1
E	A	CABLE UL USB CABLE 28AWG(7/0.12)*1P+28AWG(7/0.127)*2C+A+B(48/0.10) TIN COPPER,PVC OUETR JACKET COLOR:BLACK(GREEN PART)		PCS	1

General Tolerance		Customer Code	Title	
DIMENSION:	X ±1	411	UB116B C44XL001.5M	
	X.X ±0.5	M11453	Customer P.N.	UB116
	X.XX ±0.2	A	Model No.	
Cable length:±2% ANGLE:±45°		1 OF 1	Drawn By	Kate
ANGLE:±45°		1	Checked By	
ANGLE:±45°		1	Inspected By	
ANGLE:±45°		1	Approve By	
ANGLE:±45°		1	Date	2010.05.25
ANGLE:±45°		1	SCALE:	NONE
ANGLE:±45°		1	Units:	mm

TLE TUNG-LI, ISO-9001 E200633