
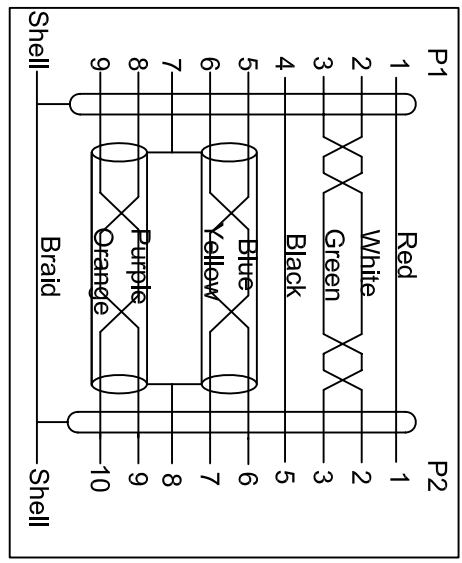
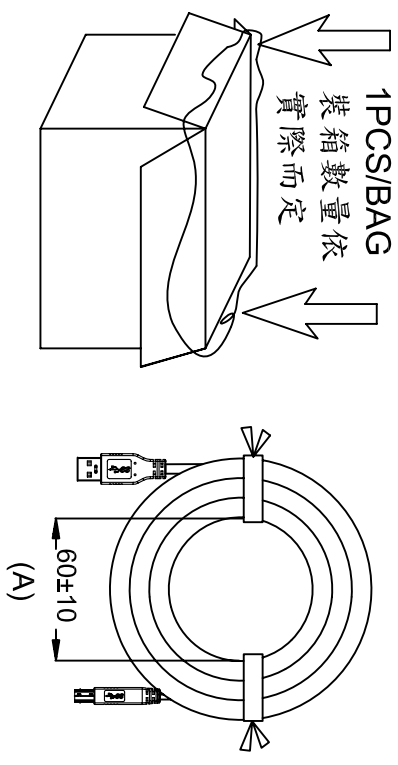


LW-R-06 A/0

REVISIONS		
ZONE	REV	DESCRIPTION
/	A	RELEASE
		DATE: 2010.08.09
		APPROVED: Ann

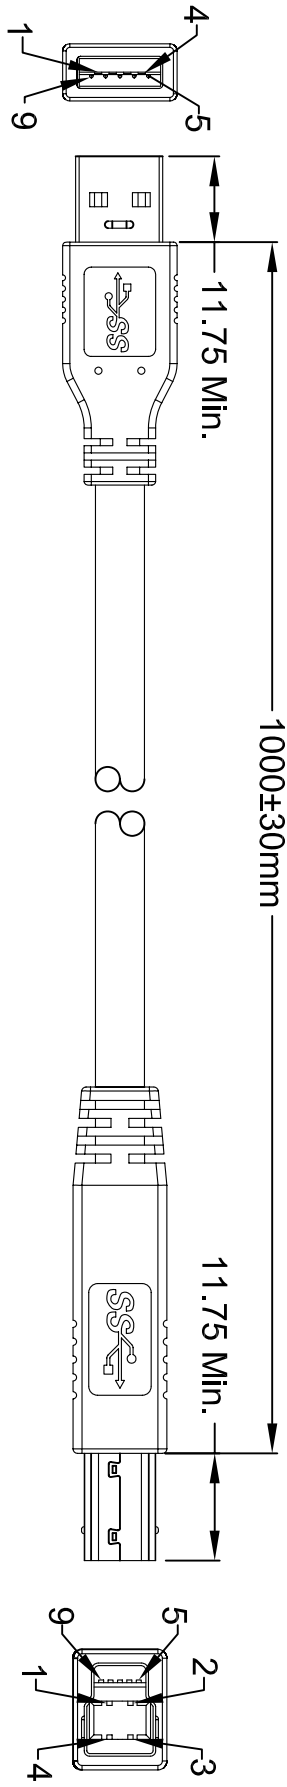

- 5. SPECIAL REQUIREMENTS**
- 5.1 Product requirement for Green environment protection:RoHS.
 - 5.2 Overmold PVC is 60P Blue (Pantone No.:301U)(RoHS).
 - 5.3 ELECTRIC TESTING:
 - . 1. 100% OPEN & SHORT TESTING
 - 2. INSULATION RESISTANCE: ≥20MΩ
 - 3. CONDUCTOR RESISTANCE: ≤ 5Ω
 - 4. VOLTAGE: 500V DC/0.1S

SPECIFICATION OF MATERIAL

1. END A CONT. PLATING Gold 30u"	MOLD No.	-	SHIELDG	-
CONNECTOR TYPE USB-9MMASS30NBU	T. SCREW	-	SHIELDG	-
2. END B CONT. PLATING Gold 30u"	MOLD No.	-	SHIELDG	-
CONNECTOR TYPE USB-9MBSS30NBU	T. SCREW	-	SHIELDG	-
3. WIRES WIRE GAUGE 24Awg&28Awg&30Awg	LENGTH 980±20±0mm	SHIELDG	AB	
CONDUCTORS 2C+1TP+1TF+4AEV2	COLOR Blue (301U)	UL/CSA	UL20276 (USB3.0)	
JACKET MATL PVC	INS. MATL INS. MATL	WIRE O.D.	5.5mm	

General Tolerance	Customer Code		667	
DIMENSION:	Drawing No	M11675		
X ±1	Publish NO.	A		
X.X ±0.5	Sheet:	1 OF 1		
X.XX ±0.2	Title.	UB109LXXX4L0M/1M		
Cable length:±2% ANGLE:±5°	Approve By	Inspected By	Checked By	Drawn By
	Boson	Ann	Kate	Winnie
				Date
				2010.08.09
				SCALE: NONE
				Units: mm

ITEM NO	ITEM	DESCRIPTION	VENDER	UNIT	QTY
8		7	6	5	4
					3
					2
					1