







LW-R-06 A/0

REVISIONS			DATE	APPROVED
ZONE	REV	DESCRIPTION	2010.08.09	Ann
/	A	RELEASE		

1000±30mm

11.75 Min.

5.4^{+0.2}mm

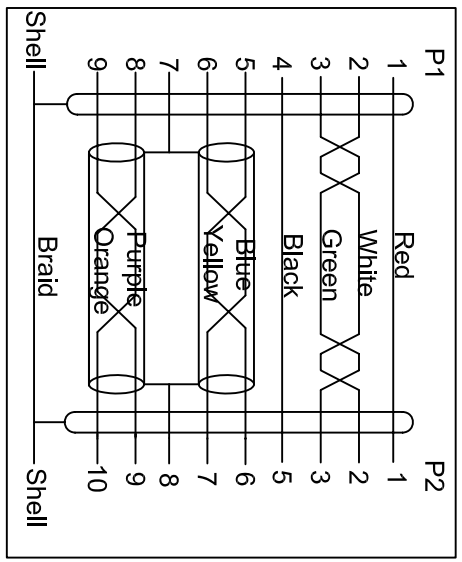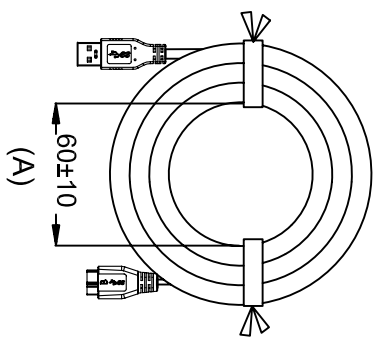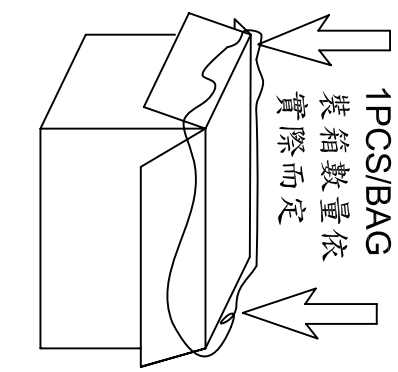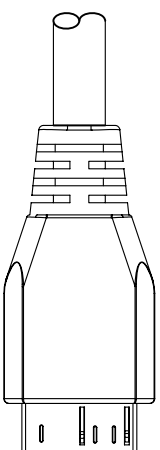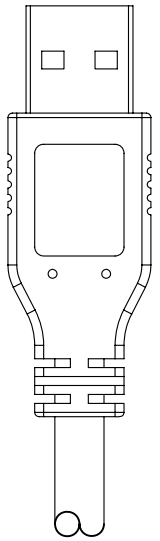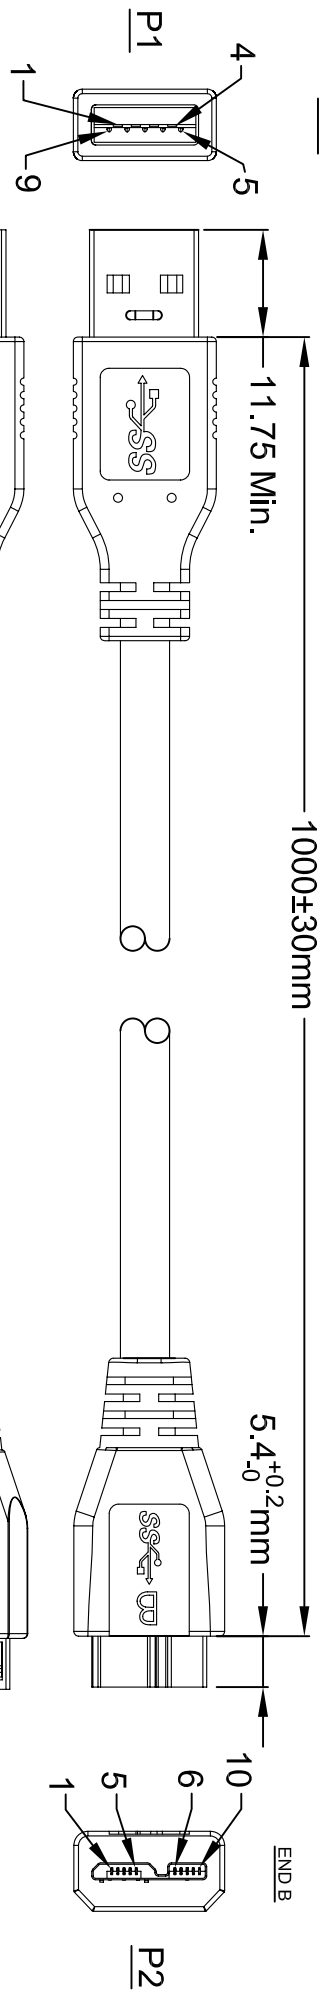

- 5. SPECIAL REQUIREMENTS**
- Product requirement for Green environment protection:RoHS.
 - Overmold PVC is 60P Blue (Pantone No.:3011U)(RoHS).
 - ELECTRIC TESTING:
 - 1. 100% OPEN & SHORT TESTING
 - 2. INSULATION RESISTANCE: ≥20MΩ
 - 3. CONDUCTOR RESISTANCE: ≤ 5Ω
 - 4. VOLTAGE: 500V DC/0.1S

SPECIFICATION OF MATERIAL

1. END A	CONT. PLATING	Gold 30u"	MOLD No.	-	SHIELDG	-
2. END B	CONNECTOR TYPE	USB3.0MASS30NB	T. SCREW	-	T. SCREW	-
3. WIRES	CONT. PLATING	Gold 30u"	MOLD No.	-	SHIELDG	-
CONDUCTORS	CONNECTOR TYPE	Micro USB B Type Plug, Nickel Plated (3.0)	T. SCREW	-	T. SCREW	-
WIRE GAUGE	WIRE GAUGE	24AWG&28AWG&30AWG	LENGTH	985±20.0mm	SHIELDG	AB
JACKET MATL	JACKET MATL	PVC	INS. MATL	INS. MATL	ULC/SA	Blue (301U)
					WIRE O.D.	5.5mm

TLE TUNG-LI, ISO-9001 E200633

General Tolerance		Customer Code	
DIMENSION:	X ±1	Drawing No	M111665
	X.X ±0.5	Publish NO.	A
	X.XX ±0.2	Sheet:	1 OF 1
Cable length: ±2%		Title:	UB112LXXX4L0M/1M
ANGLE: ±5°		Model No.	UB112

ITEM NO	ITEM	DESCRIPTION	VENDER	UNIT	QTY
8	8		Boson		

APPROVE BY	INSPECTED BY	CHECKED BY	DRAWN BY	DATE	SCALE:	UNITS:
Ann	Ann	Ann	Kate	2010.08.09	NONE	mm