




LW-R-06 A/0

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
/	A	RELEASE	2010.07.21	ANN
/	A	增加SR標號	2010.07.27	ANN
/	A	變更線材(DI)/增加測試條件,圖面回收不改版	2010.08.10	ANN
/	B	變更扎線方式及變更線到小線槽的尺寸	2010.09.27	ANN

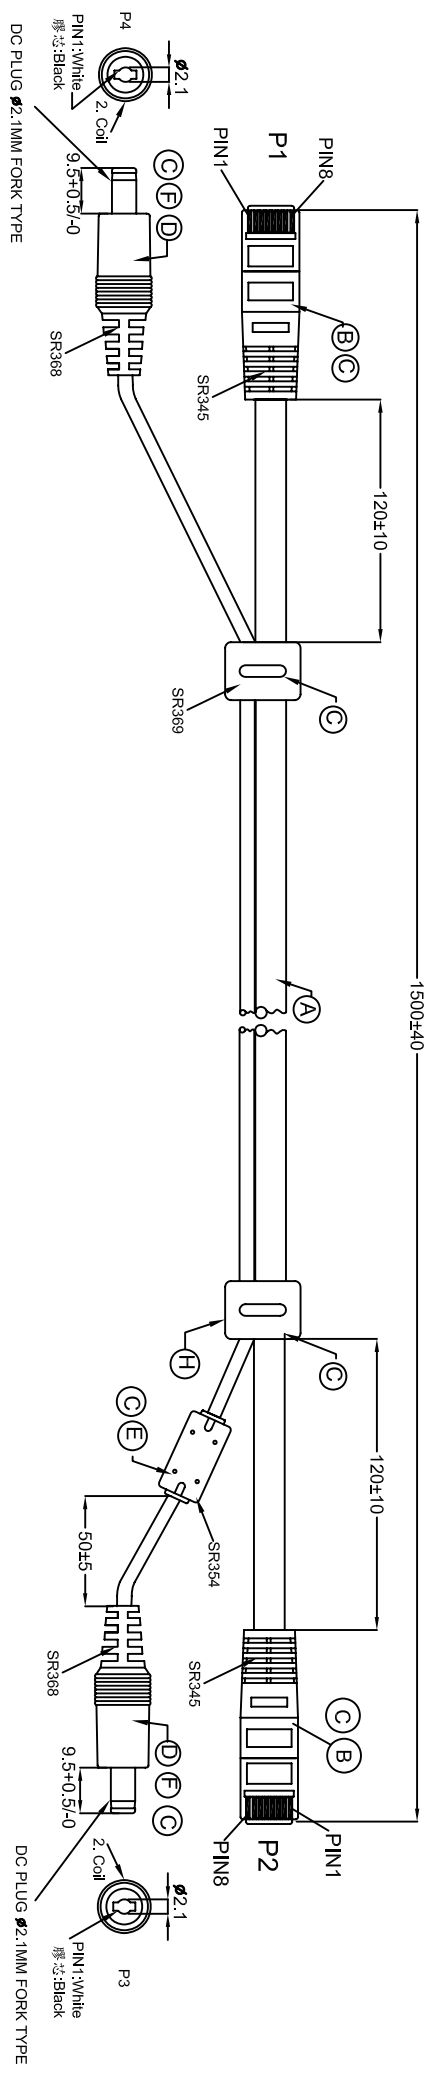

P1	P2	P3	P4
1 — white/orange	1 — white	1 — white	
2 — orange	2 — Braid+wire	1 — twists	
3 — white/green	3 —	2 —	
4 — green	4 — blue		
5 — white/blue	5 — white/brown		
6 — white/brown	6 — brown		
7 —			
8 —			



NOTE:
 1. Molding 8P8C plug strip PVC jacket 14mm. DC plug strip PVC jacket 8mm.
 2. Cable coiling 4 circles end Mini tie.
 3. 100% test open, short & miswire.
 4. All material are RoHS compliant.

Electrical Characteristics:
 Insulation Resistance:5M ohm
 Conductor Resistance: 3 ohm
 Voltage:300V
 DC JACK 端要做搖擺測試
 DC JACK端要與水晶頭平齊,落差不能超過10MM

ITEM NO	ITEM	DESCRIPTION	VENDER	UNIT	QTY
A	WIRE	18AWG(4/10,16/5)*1C WH+Serial (4/10,16) PVC Ø3.7mm+26AWG(7/0,16BC)4PAIR (HD+PE)OD:8.0*9.8mm JACKET (80P) PVC BLACK (GREEN PART)		PCS	1
B	CONNECTOR	US PLUG 8P8C 3U*(GREEN PART)		PCS	2
C	PVC	PVC 65P BLACK (GREEN PART)		PCS	7
D	PVC	PVC 65P BLACK (GREEN PART)		PCS	2
E	CORE	RH14.2*28.5*6.35 (GREEN PART)		PCS	1
F	TUBE	TUBE 250°C BLACK Ø1.5*6MM(GREEN PART)		PCS	2

General Tolerance		Customer Code	
DIMENSION:	X ±1	Drawing NO.	E4635
	X.X ±0.5	Publish NO.	B
	X.XX ±0.2	Sheet:	1 OF 1
	Cable length:±2% ANGLE:±5°	Title:	TL175BZ881L0M/1.5M/2
		Approve By	Inspected By
		Checked By	Drawn By
		Ruby	DATE
			2010.09.27
			SCALE: NONE
			Units: mm